



Industrial Unit

242-48 2-Light; 40-Watt

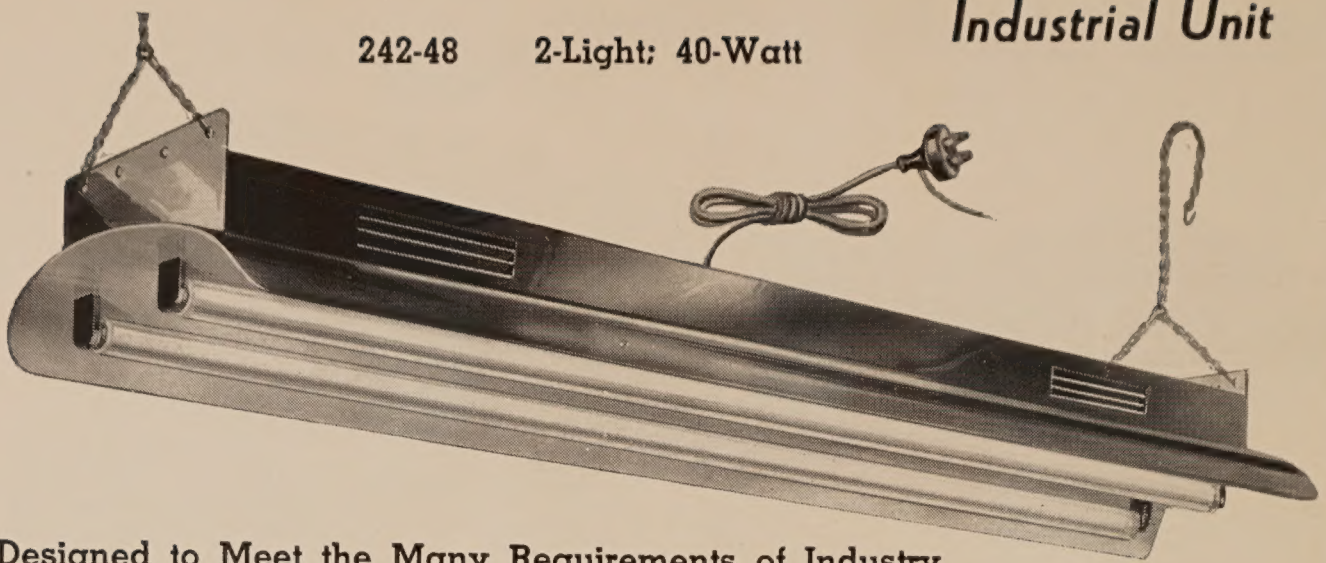



Designed to Meet the Many Requirements of Industry

Rigidly Constructed of Heavy Gauge Steel. Body of Fixture—Length, 49"; Width, 12"; Depth, 5". Finish—White Baked Enameled Reflector. Exterior—Aluminum, furnished complete with a pair of 7-foot hanging chains, arranged to permit raising or lowering fixture. Slots provided in end plates for tilting fixture. 6 feet of heavy duty rubber cord and plug with ground wire, ready to plug into your socket.

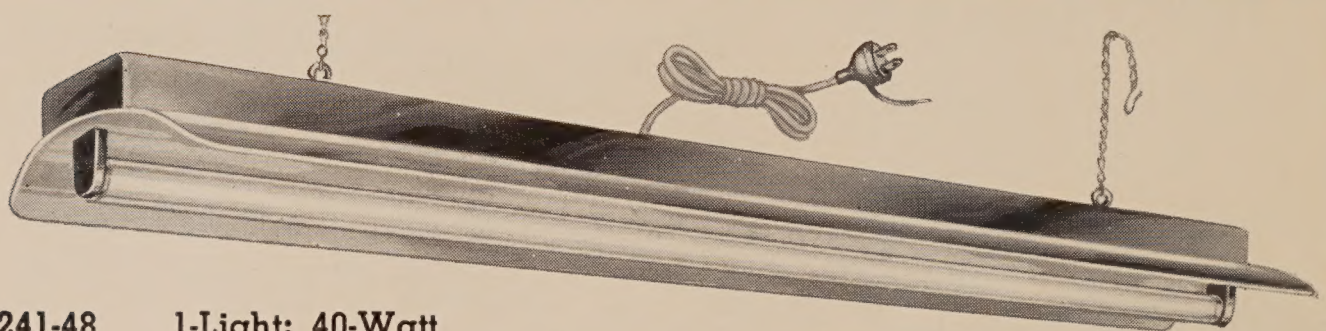

241-48 1-Light; 40-Watt

Body of Fixture—Length, 49"; Width, 7"; Depth, 4½". Finish—White Baked Enameled Reflector. Exterior—Aluminum, furnished complete with a pair of 7-foot chains for hanging. 6 feet of heavy duty rubber cord and plug with ground wire.

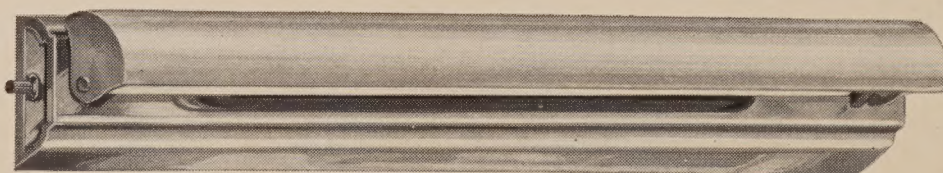

361-18—1-Light; 15-Watt Reflector Bracket

361-24—1-Light; 20-Watt Reflector Bracket

Fluorescent Brackets

No.	Wattage	Dimensions
371-18	1 15-Watt	19¾" x 3½"
371-24	1 20-Watt	25¾" x 3½"
361-18	1 15-Watt	19¾" x 3½"
361-24	1 20-Watt	25¾" x 3½"
391-18	1 15-Watt	26¾" x 3½"
391-24	1 20-Watt	32¾" x 3½"

For Convenience Outlet—Add "C"
After Number

All Brackets Furnished With On and Off Switch
Finish—Polished Chrome

Brackets 391-18 and 391-24 also available in Chrome with
Antique Gold Finish on Top and Bottom Trim.

391-18 1-Light; 15-Watt


391-24 1-Light; 20-Watt

371-18 1-Light; 15-Watt

371-24 1-Light; 20-Watt

Fluorescent Lighting


322-48 2-Light; 40-Watt

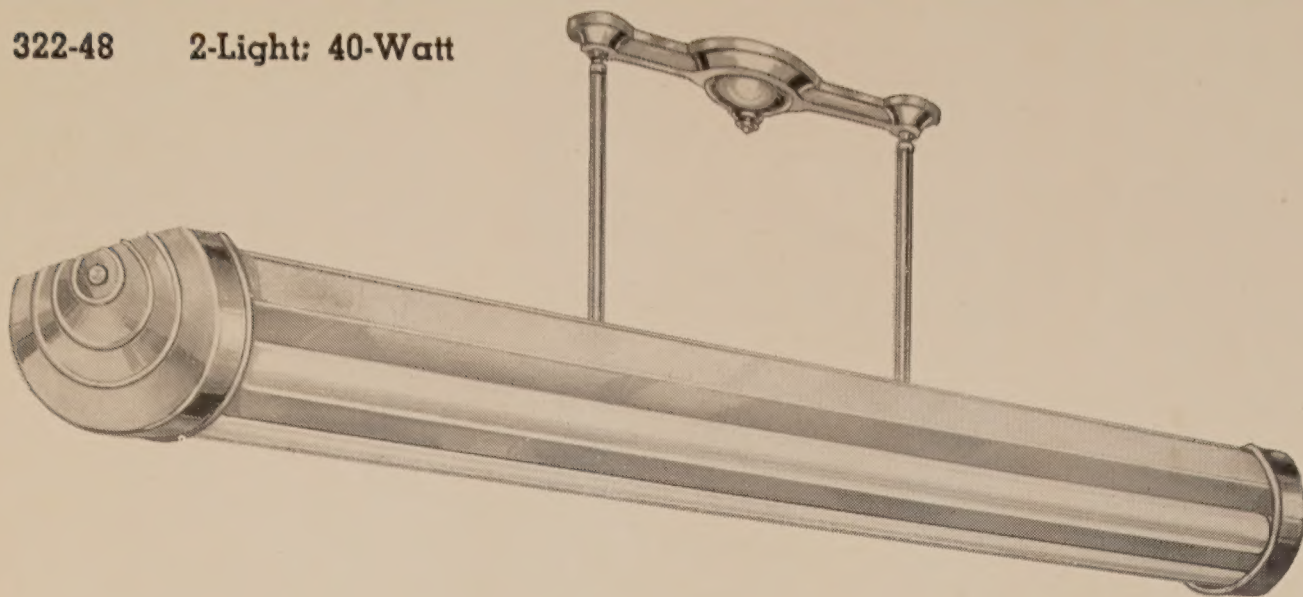

Height Overall, 36". Body, 48" x 6½". Finish, White Baked Enamel Reflector. End Guards, White Baked Enamel with Chrome Trim. Hanger, Aluminum.

312-48 2-Light; 40-Watt

Glass Shielded

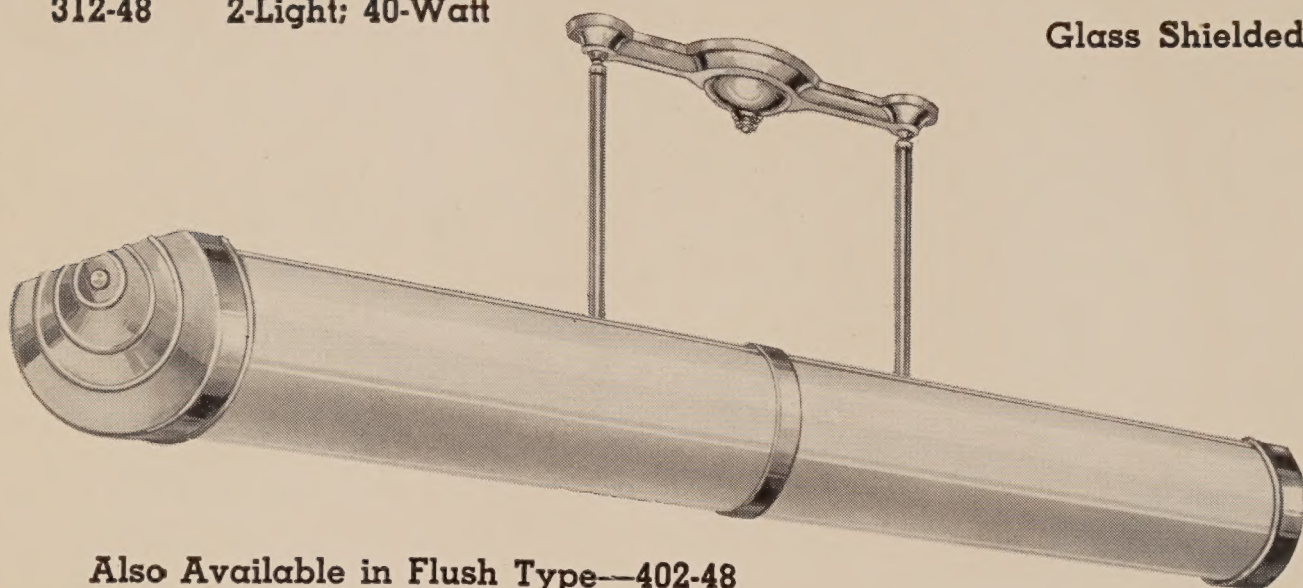


Also Available in Flush Type—402-48

Height Overall, 36". Body, 48" x 6½". Finish, White Baked Enamel Reflector. End Guards, White Baked Enamel with Chrome Trim. Hanger, Aluminum. Glass Diffuser, White Glass with Satin Etched Bottom Section for Concentrated Downward Lighting.

412-48 2-Light; 40-Watt


Flush Type

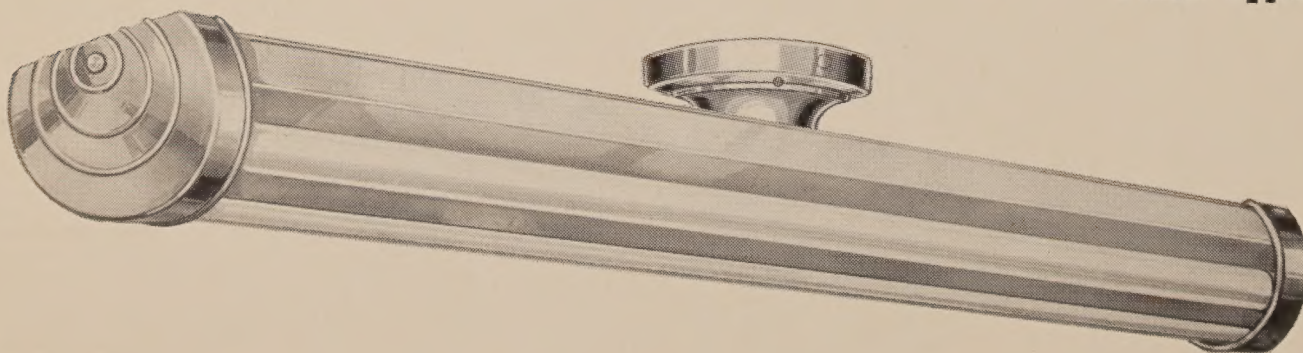

Height Overall, 8". Body, 48" x 6½". Finish, White Baked Enamel Reflector. End Guards, White Baked Enamel with Chrome Trim. 6" Canopy. Aluminum Finish. Complete with cross bar and screws for permanent installation.


The Daylight Way

322-24 2-Light;
.20-Watt

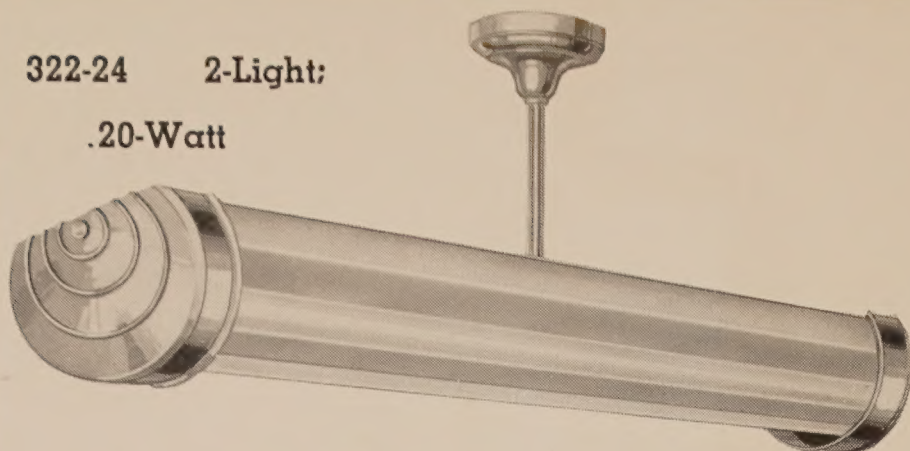

Height Overall, 28". Body, 24" x 6½". Finish, White Baked Enameled Reflector. End Guards, White Baked Enamel with Chrome Trim. Hanger, Aluminum.


Height Overall, 8½". Body, 24" x 6½". Finish, White Baked Enameled Reflector. End Guards, White Baked Enamel with Chrome Trim. With 6" Canopy Fitter. Aluminum Finish. Complete with cross bar and screws for permanent installation. (Also adaptable as 6" Converter.)

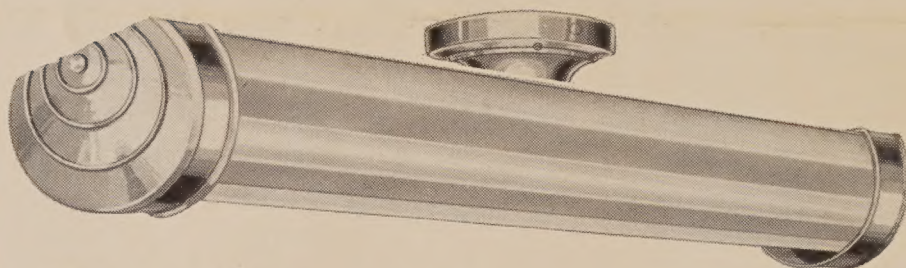

412-24 2-Light; 20-Watt

342-24—Same as above except has 4" Converter Fitter. Complete with cord and plug.

312-24
2-Light; 20-Watt

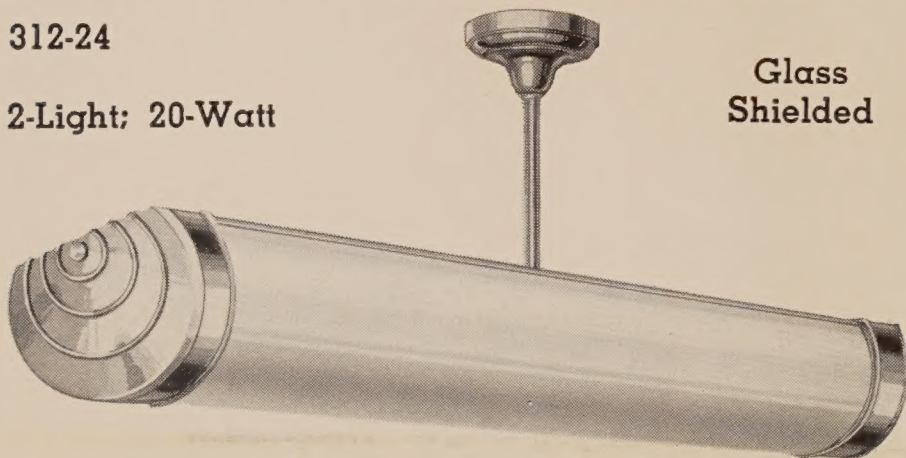

Glass
Shielded

Height Overall, 28". Body, 24" x 6½". Finish, White Baked Enameled Reflector. End Guards, White Baked Enamel with Chrome Trim. Hanger, Aluminum.

Glass Diffuser—White Glass with Satin Etched Bottom Section for Concentrated Downward Lighting.

Height Overall, 8½". Body, 24" x 6½". Finish, White Baked Enameled Reflector. End Guards, White Baked Enamel with Chrome Trim. With 6" Canopy Fitter. Aluminum Finish. Complete with cross bar and screws for permanent installation. (Also adaptable as 6" Converter.)




Glass
Shielded

402-24 2-Light; 20-Watt

332-24—Same as above except has a 4" Converter Fitter. Complete with cord and plug.

Glass Diffuser—White Glass with Etched Bottom Section for Concentrated Downward Lighting.

Eye Health Illumination

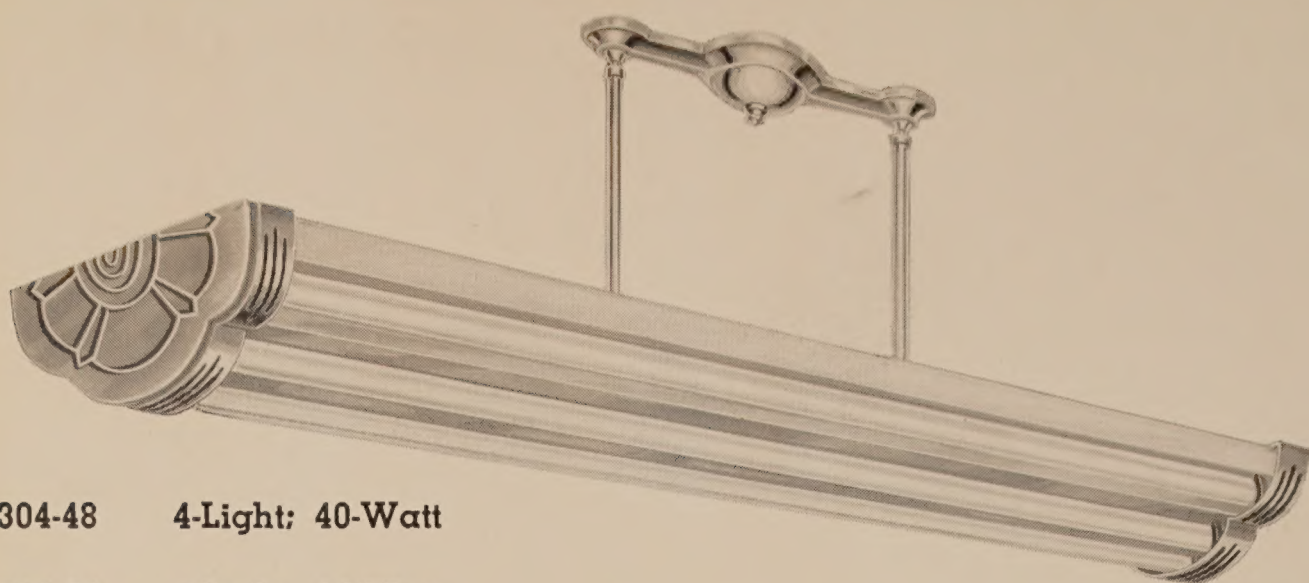

304-48 4-Light; 40-Watt

304-24 4-Light; 20-Watt


304-48—Height Overall, 36". Body, 49" x 12".

304-24—Height Overall, 36". Body, 24" x 12".

Finish, White Baked Enameled Reflector.

End Guards and Hanger, Aluminum.

(For Flush Type See Price List)

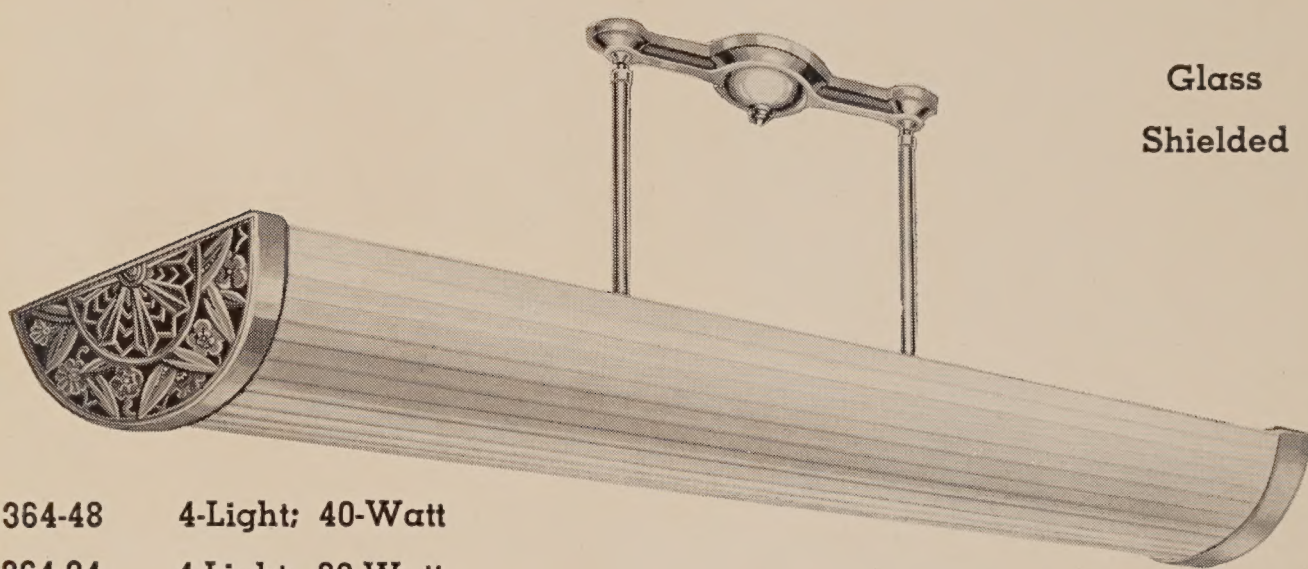

Glass
Shielded

364-48 4-Light; 40-Watt


364-24 4-Light; 20-Watt

364-48—Height Overall, 36". Body, 49" x 12".

364-24—Height Overall, 36". Body, 24" x 12".

Finish, White Baked Enameled Reflector. End Guards and Hanger, Satin or Polished Aluminum.

Also available in Antique Gold. Glass Diffuser—Reeded Satin Etched. (For Flush Type See Price List.)

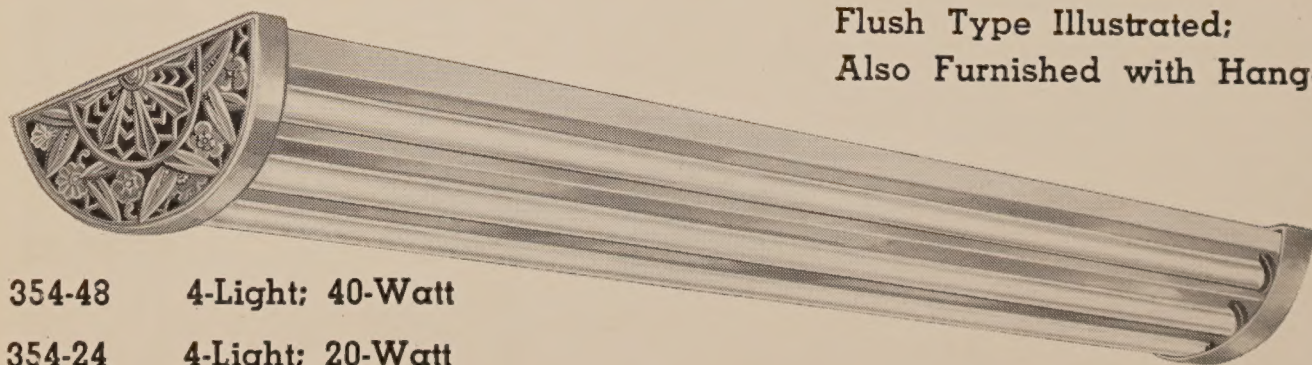

Flush Type Illustrated;
Also Furnished with Hanger

354-48 4-Light; 40-Watt


354-24 4-Light; 20-Watt

354-48—Height Overall, 8½". Body, 49" x 12".

354-24—Height Overall, 8½". Body, 25" x 12".

Finish, White Baked Enameled Reflector. End Guards and Hanger, Satin or Polished Aluminum. Also available in Antique Gold.

Window Lighting

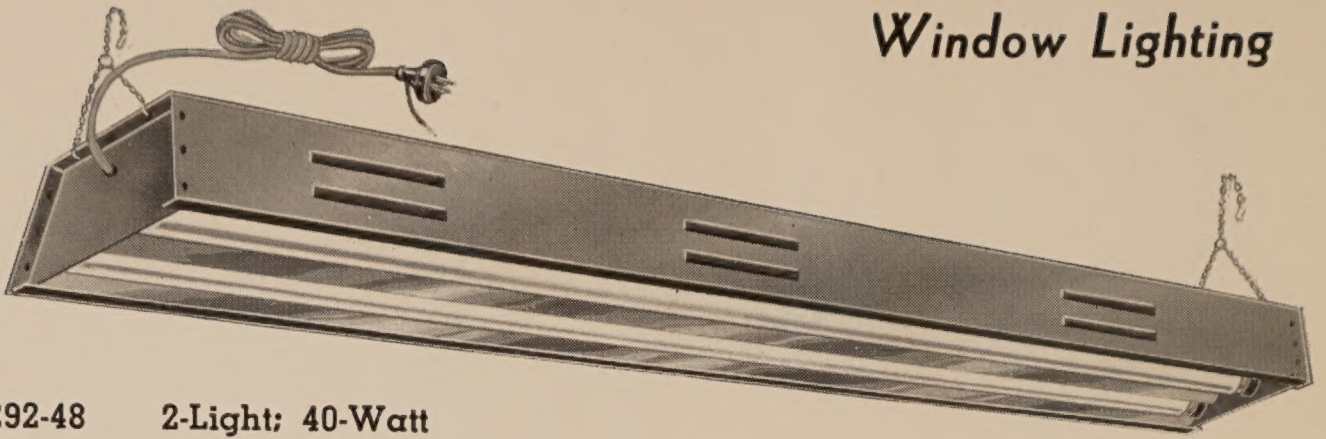


292-48 2-Light; 40-Watt

292-24 2-Light; 20-Watt

292-48—Length, 49". Width, 8½". Height, 4½".

292-24—Length, 25". Width, 8½". Height, 4½".

Finish, White Baked Enameled Reflector. Exterior, Aluminum.
These complete units can be used individually or in multiples of two or more, attached end to end, flush or suspended on chain, which are furnished complete with approved cord and plug, ready to install.

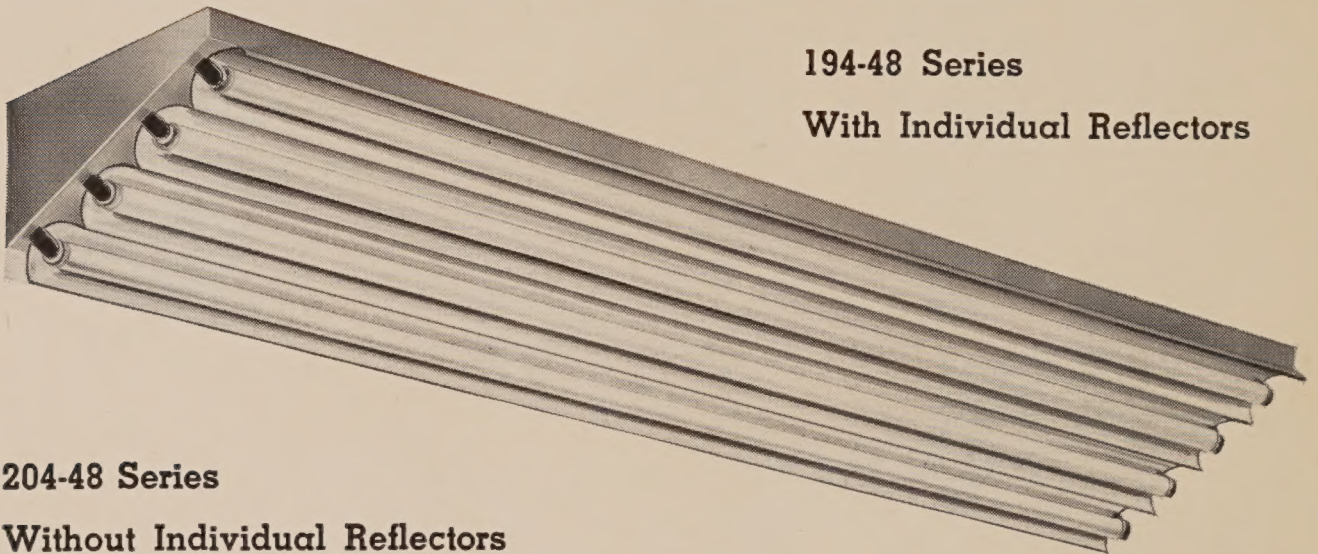

194-48 Series

With Individual Reflectors

204-48 Series

Without Individual Reflectors

Angle Type Window Lighting

194-48 Series

With Individual Bulb Reflectors (As Illustrated)



2 Lights

No.	Total Lamps and Wattage	Width	Length	Depth
194-48	4 40-Watt	12"	49"	7"
194-24	4 20-Watt	12"	25"	7"
193-48	3 40-Watt	9½"	49"	7"
193-24	3 20-Watt	9½"	25"	7"
192-48	2 40-Watt	6½"	49"	7"
192-24	2 20-Watt	6½"	25"	7"


204-48 Series

Without Individual Bulb Reflectors

No.	Total Lamps and Wattage	Width	Length	Depth
204-48	4 40-Watt	12"	49"	6"
204-24	4 20-Watt	12"	25"	6"
203-48	3 40-Watt	9½"	49"	6"
203-24	3 20-Watt	9½"	25"	6"
202-48	2 40-Watt	6½"	49"	6"
202-24	2 20-Watt	6½"	25"	6"



3 Lights



4 Lights


Finish, White Baked Enamel Reflecting Surface.
Exterior, Aluminum.

FLEUR-O-LIER



What These Labels on Our Products Mean to You

FLEUR-O-LIER—An important name in Fluorescent Lighting. Assurance of good lighting, balanced performance and satisfactory service. These labels certify compliance with 54 rigid specifications as set forth and approved by electric testing laboratories.



Approval of Underwriters' Laboratories, Inc. Fixtures, wiring, auxiliary equipment, sockets and starters tested and approved by Underwriters' Laboratories, Inc., as complying with the requirements of the National Electric Code.



UNION MADE

Our products are union made and labels applied to each individual unit.

BULLETIN No. 141 FLUORESCENT LIGHTING

The Daylight Way to Better Illumination

In this Bulletin we present a most complete line of Commercial and Industrial Quality Fluorescent Fixtures, sturdily constructed and smartly designed to produce the maximum of efficiency and performance and priced at new low levels. A few of the many important advantages:

- Higher Levels of Illumination.
- Cool, Glareless Distribution of Light.
- Stroboscopic (Flicker) Practically Eliminated.
- Increased Working Efficiency.
- Daylight Quality Illumination.
- No Special Wiring Required; Easy to Install.